




Model No.	428D	428F	428G
Motor (kW)	1.5	1.5	2.2
Phase	3	3	3
Maximum Running Current (A)	3.5	3.5	4.7
Weight (kg)	6	8	8
Noise Level dB(A) *	78	82	82

Current readings are based upon voltages of 400V 3 Phase and 230V 1 Phase.

* Noise levels have been measured at a distance of 1m from the blower, which was fitted with an inlet silencer and a ducted outlet. In some modes of use, these fans may generate high noise levels. It will be necessary to carry out a noise survey after installation.

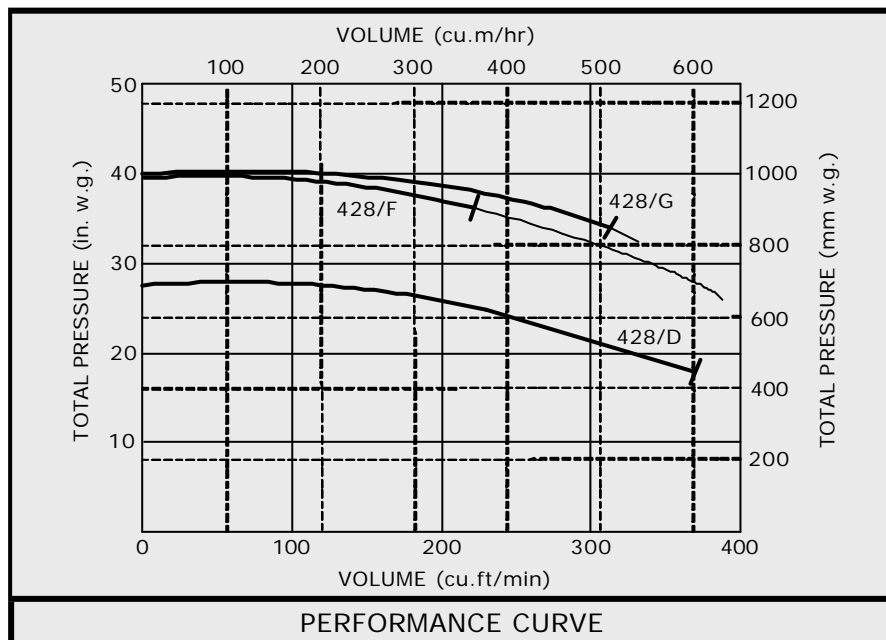

Thick line on performance curve shows limits of continuous rating.

